


Buddy Products

HOW TO CHANGE THE LOCK ON SECURITY AND CASH BOXES

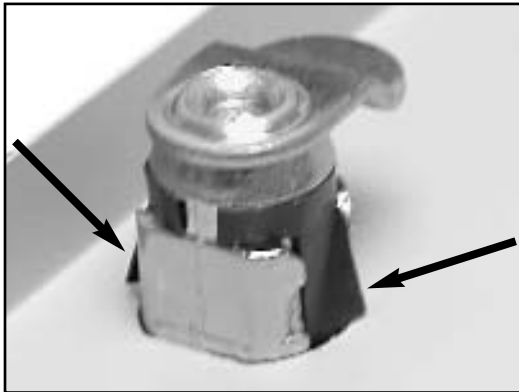

Pinch black metal flaps with pliers to loosen and release lock. Note there is a black flap on each side of the lock.

Step 1: With pliers pinch the black flaps on the sides of the lock as noted above. Once the black metal flaps are flat against the lock, with the pliers jiggle the lock out of the hole. Once the lock starts coming out and the black flaps are on the other side of the metal hole you can pull the lock the rest of the way out with your fingers.



Step 2: Remove the lock completely.



Step 3: To insert new lock angle the lock down and insert the largest section into the hole first.



Step 4: Once it is completely in turn the lock so the large end is facing the right, so the lock is in the "locked" position and the black flaps are in position on the top and bottom of the hole.



Step 5: Once lock is in position push the lock completely through with your fingers until the black pegs lock into place.



Step 6: Push the lock completely through with your fingers until the black pegs lock into place.